




STRAIGHT SIDE PRESS
SINGLE CRANK
BXH1 Series



www.shribalajipresses.com



STRAIGHT SIDE SINGLE CRANK PRESS BXH1 SERIES

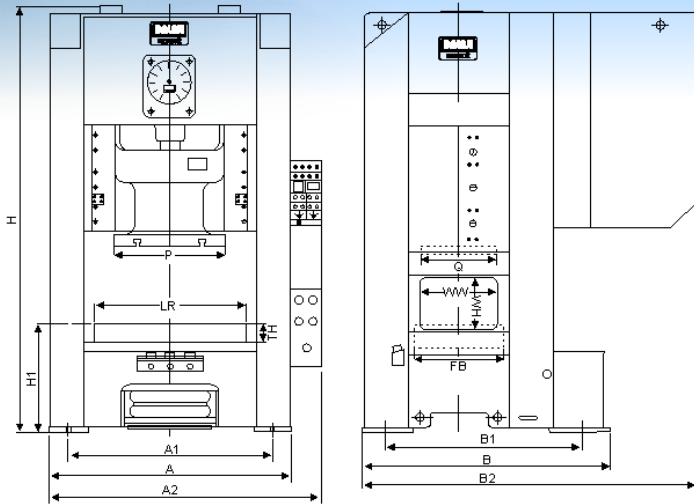

Standard Accessory:

- Main Motor
- Plc Controlled System (bpc-2.1)
- Automatic Grease Lubrication Device
- Hydraulic Overload Protector
- Motorized Slide Adjustment
- Shut Height Indicator
- Production Counter
- Dual Solenoid Valve
- Rotary Cam Limit Switch
- Counter Balance For Slide Portable Operation Stand

Optional Accessory:

- Pneumatic Die Cushion
- Photo Electrical Safety Device
- Anti Vibration Mount
- Foot Switch
- Knockout Device
- Quick Die Change System
- Variable Speed Drive
- Coil And Strip Feeder
- Press Control System (bpc-3.1)
- Touch Screen Panel With Error Message
- Digital Crank Angle Indicator

SPECIFICATIONS

Model		BXH1-110	BXH1-160	BXH1-200	BXH1-250
Capacity		110	160	200	250
Stroke Length	mm	125	160	200	220
Stroke Length Variable	mm	8-125	8-160	-	-
Stroke Per Minutes	S.P.M.	50	40	35	30
Rated Tonnage Point	mm	5	6	6	6
Shut Height	mm	360	450	500	500
Slide Adjustment	mm	90	100	120	120
Slide Area (PxQ)	mm	650x520	720x580	800x680	900x800
Bolster Area (LRxFB)	mm	1000x680	1100x760	1250x840	1300x900
Bolster Thickness (TH)	mm	140	165	180	180
Floor to Bolster (H1)	mm	900	900	1000	1000
Window in Upright (WWxWH)	mm	650x350	700x400	800x450	800x450
Main Motor	HP	10	15	20	25
Motor of Slide Adjustment	HPxP	1x4	2x4	2x4	2x4
Foot Size (AxB)	mm	1450x1530	1600x1840	1810x1985	1860x2240
Position of Anchor Bolts (A1xB1)	mm	1250x1230	1350x1510	1510x1600	1560x1850
Overall Space (A2xB2)	mm	1600x1830	1750x2135	1970x2250	2020x2540
Press Height (w/o Mounts) (H)	mm	2950	3235	3685	3775
Air Pressure Required	(kg/cm)	5	5	5	5
Pneumatic Die Cushion (Optional)	Tonnage	10	15	20	20
	Stroke	70	90	110	110
	Pad Area	480x300	540x340	640x440	640x440

Manufactured by :

SHRI BALAJI PRESSES PVT. LTD.

C-96, Sector-1, Tala Nagri, Ramghat road

Aligarh-202001 (U.P.) INDIA

Ph.: +91 571 2780033, 2780044, 9568651222

email.: info@sbppl.in, balajipresses@gmail.com